

**DT TRUCK 22F**



**DT TRUCK 72F**

## STANDARD EQUIPMENT

220V/380V power supply to the cage  
 Auto levelling basket  
 Auto-jacking/turntable levelling function  
 Cage hook (max 300 kg / 660 lbs)  
 Cage multifunction pin  
 Cage rotation  
 Dead man pedal both on the cage and on turntable controls  
 Double telescopic extension booms  
 Fully electronic proportional hydraulic controls driven by canBUS system  
 Hands free intercom system ground/cage  
 Memory function  
 One click auto-closing function  
 Remote management and diagnostic software  
 Smooth movements, no flapping with brakes and ramps  
 Variable outreach management  
 Water sprinkler for cage protection

## STANDARD COMPLIANCE

UNI EN 1777  
 UNI EN 1846  
 CE (european certification)






## PERFORMANCES

	<i>metric</i>	<i>US</i>
Working height	22 m	72 ft 2 in
Horizontal outreach	14 m	45 ft 11 in
Up and over clearance	10 m	32 ft 10 in
Downreach	- 5 m	- 16 ft 5 in
Lift capacity	300 kg	660 lbs
Minimum GVW	5 T	11023 lbs
Water capacity	700 to 1000 l/min	180 to 260 GPM (US liquid)
Operating wind speed	12,5 m/s	71 fps

## MEASUREMENTS

	<i>metric</i>	<i>US</i>
Foldable front platform	1150x250 mm	3 ft 9 in x 10 ft
<b>A</b> Rescue cage size	1800x830x1180 mm	5 ft 11 in x 2 ft 7 in x 3 ft 11 in
<b>B</b> Height*	2470 mm	8 ft 1 in
<b>C<sub>1</sub></b> Length* basket off	7050 mm	23 ft 2 in
<b>C</b> Length*	7880 mm	25 ft 10 in
<b>D<sub>1</sub></b> Width* outriggers in	2230 mm	7 ft 4 in
<b>D</b> Width* outriggers out	3780 mm	12 ft 5 in
<b>E</b> Departure angle* (minimum)	12°	22%

\* Depending on chassis

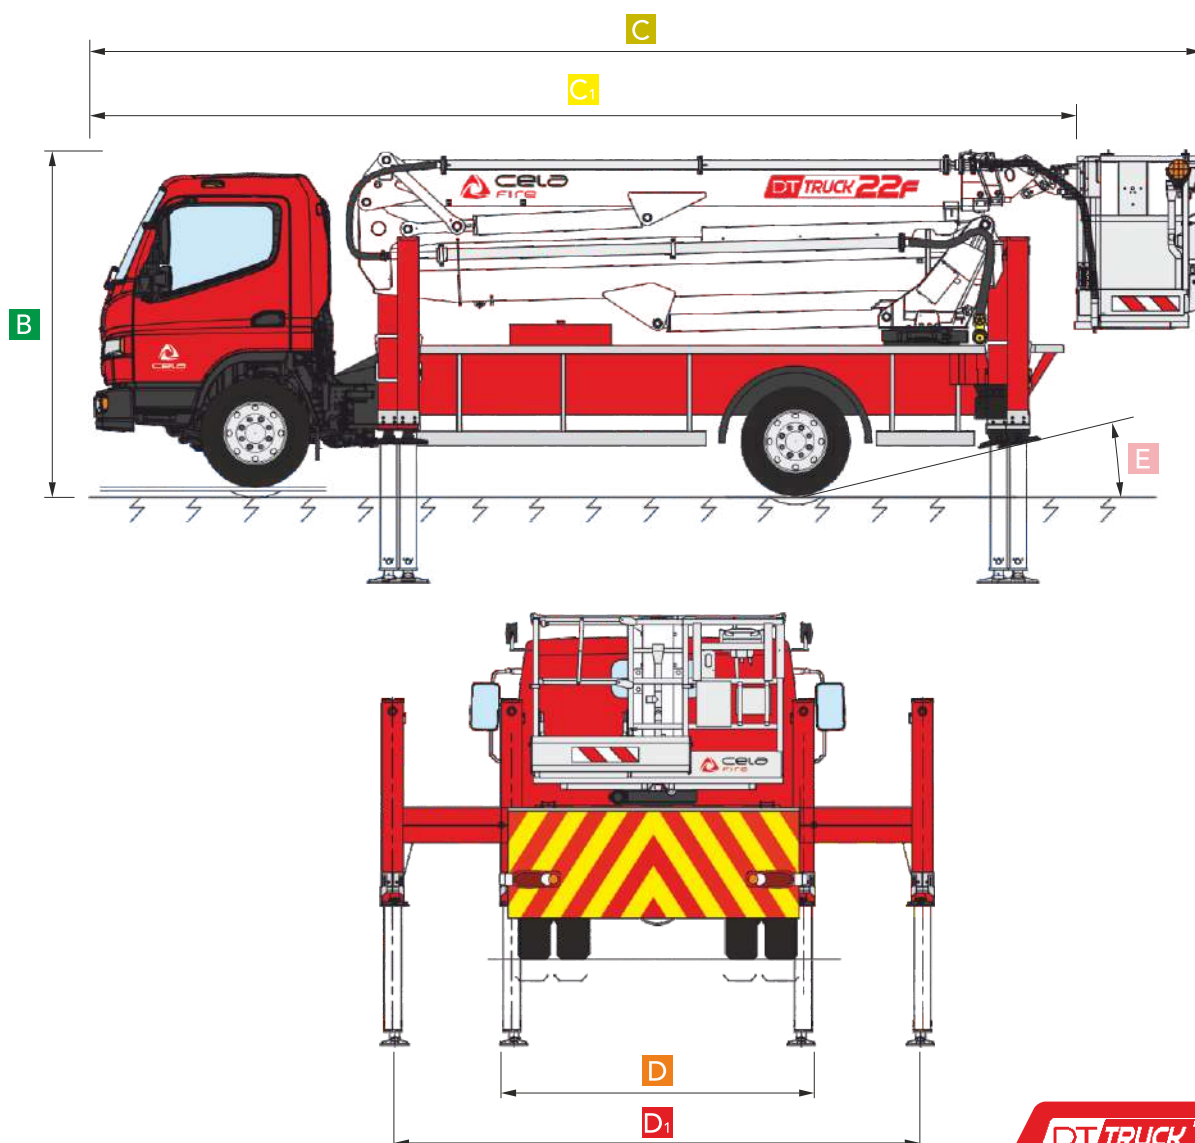

360° CONTINUOUS

