

**DT TRUCK 28F**



**DT TRUCK 92F**

## STANDARD EQUIPMENT

220V/380V power supply to the cage  
 Auto levelling basket  
 Auto-jacking/turntable levelling function  
 Cage hook (max 300 kg / 660 lbs)  
 Cage multifunction pin  
 Cage rotation  
 Dead man pedal both on the cage and on turntable controls  
 Double telescopic extension booms  
 Fully electronic proportional hydraulic controls driven by canBUS system  
 Hands free intercom system ground/cage  
 Memory function  
 One click auto-closing function  
 Remote management and diagnostic software  
 Smooth movements, no flapping with brakes and ramps  
 Variable outreach management  
 Water sprinkler for cage protection

## STANDARD COMPLIANCE

UNI EN 1777  
 UNI EN 1846  
 CE (european certification)




**PERFORMANCES**

	<i>metric</i>	<i>US</i>
Working height	28 m	91 ft 10 in
Horizontal outreach	14 m	45 ft 11 in
Up and over clearance	16 m	52 ft 6 in
Downreach	- 5,5 m	- 18 ft
Lift capacity	300 kg	660 lbs
Minimum GVW	10 T	22046 lbs
Water capacity	700 to 1100 l/min	180 to 260 GPM (US liquid)
Operating wind speed	12,5 m/s	71 fps

**MEASUREMENTS**

	<i>metric</i>	<i>US</i>
Foldable front platform	1150x250 mm	3 ft 9 in x 10 in
<b>A</b> Rescue cage size	1800x830x1180 mm	5 ft 11 in x 2 ft 7 in x 3 ft 11 in
<b>B</b> Height*	2750 mm	9 ft
<b>C<sub>1</sub></b> Length* basket off	7260 mm	23 ft 10 in
<b>C</b> Length*	8090 mm	26 ft 6 in
<b>D</b> Width*	2500 mm	8 ft 2 in
<b>E</b> Departure angle* (minimum)	12°	22%

\* Depending on chassis

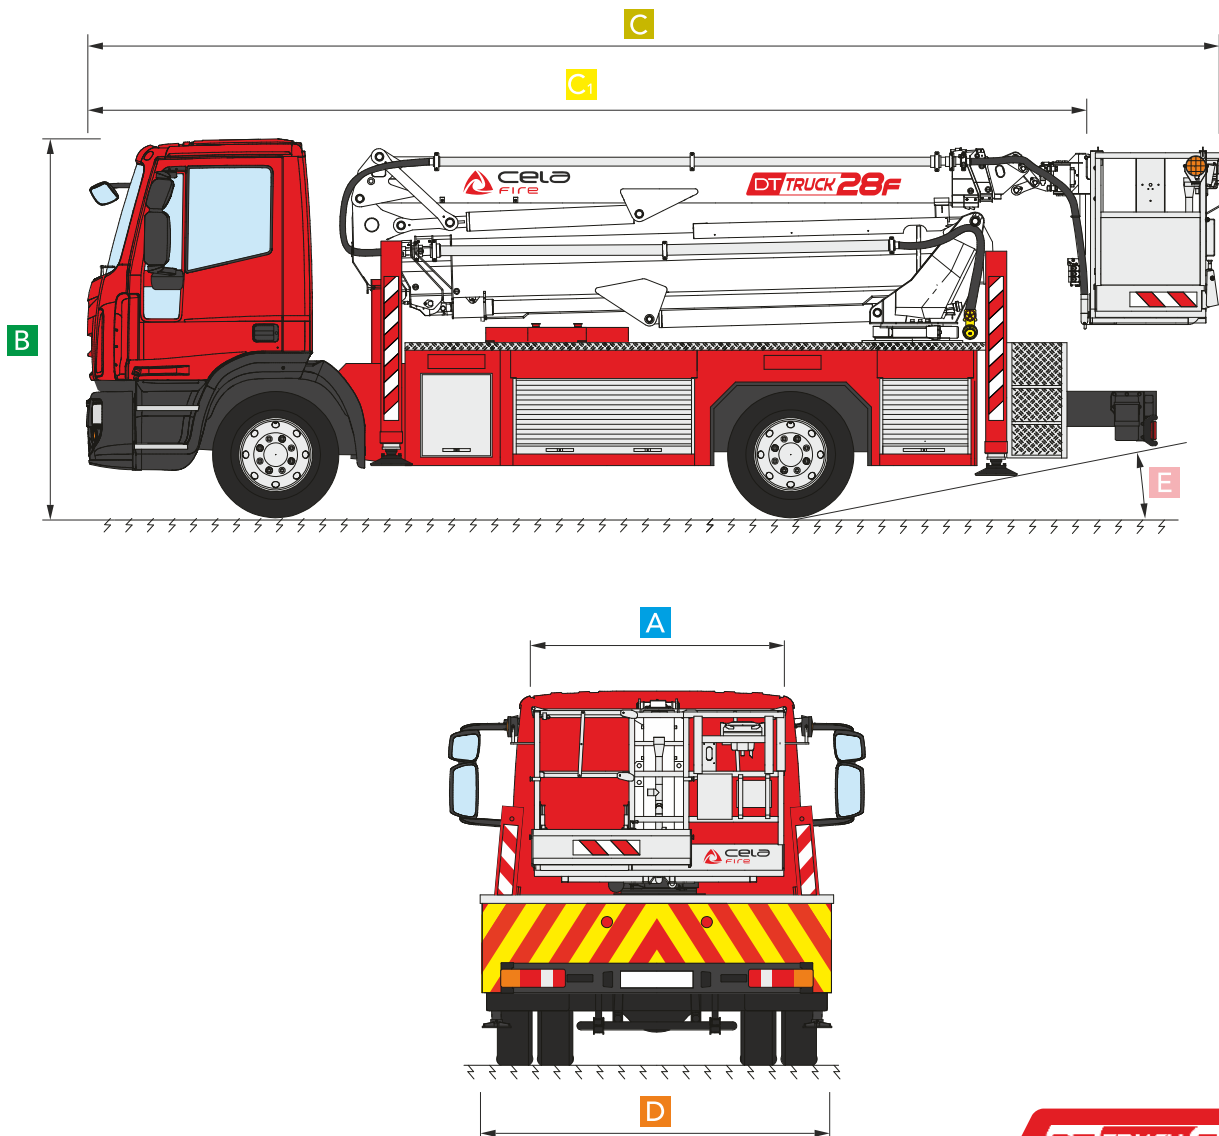



360° CONTINUOUS

